



The Elite Series Down Lights

First Class, High Lumen Output

Our Elite series are our first class LED down Lights. Designed with the best COB technology light source to achieve a high luminous flux and a high CRI. It also comes with a nicely build aluminium heat sink and an optional adjustable casing to give you the best lighting effect. No more worries with high ceilings or lumen output, our Elite Series are able to do the job.

Adjustable Casing, Narrow Angle Module

The luminaire can have an optional adjustable casing and 24 degrees narrow beam angle to give you a much more concentrated focus and a better directional control of your lighting effect.

Applications:

- Retail Outlets
- Lobby/Atrium Area
- General Lighting
- Commercial Building

Model:

NX-DL-SLMD (Wide Angle)

NX-DL-SLMS (Adjustable, narrow)

(28W-2000lm; 35W-3000lm)

from diameter 3"-8"

Powered by **PHILIPS**

Thinking of lights the different way. Save more, do more with LEDs.

NOXEL LED. *Light of the future.*

NOXEL[®]
LED LUMINAIRES


WWW.NOXEL.COM

LED DOWNLIGHTS (RECESSED) - NOXEL ELITE SERIES



NOXEL ELITE SERIES


IP44



Module Powered by: **PHILIPS**

Specification

Model Code	Wattage	Luminous Flux (28W/35W)	Beam Angle (°)	Length (mm)	Diameter (mm)	Cut-out Size (mm)	Weight (g)
NX-DL-4-SLMD-A	28W/35W	2000/3000	40°/60°	128	115	105	600
NX-DL-5-SLMD-A	28W/35W	2000/3000	40°/60°	142	145	133	800
NX-DL-6-SLMD-A	28W/35W	2000/3000	40°/60°	158	170	148	1200
NX-DL-8-SLMD-A	28W/35W	2000/3000	40°/60°	162	197	180	1400
NX-DL-3-SLMS-A	28W/35W	2000/3000	24°	115	116	105	500
NX-DL-4-SLMS-A	28W/35W	2000/3000	24°	125	146	132	600
NX-DL-5-SLMS-A	28W/35W	2000/3000	24°	143	166	155	800

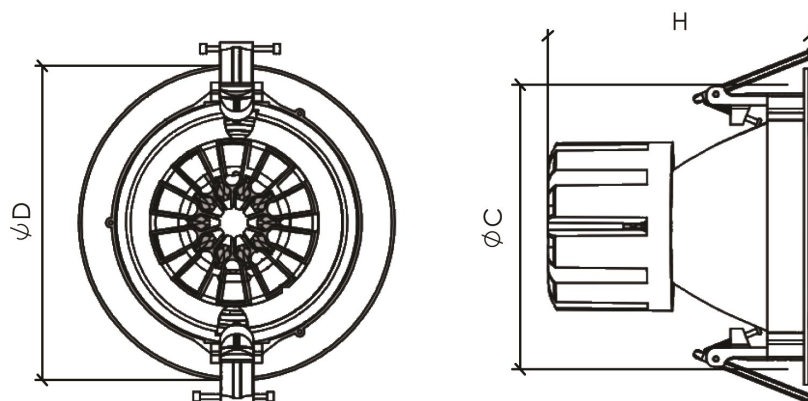


NOXEL[®]
LED LUMINAIRES


WWW.NOXEL.COM

LED DOWNLIGHTS (RECESSED) - NOXEL ELITE SERIES


Photometric Data

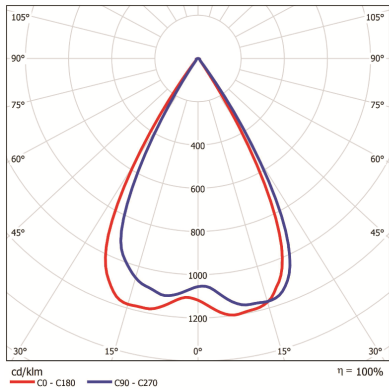


NX-DL-4-SLMD

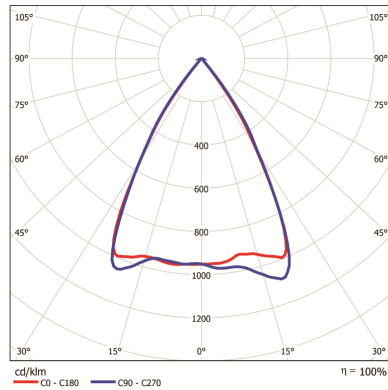


NX-DL-8-SLMD

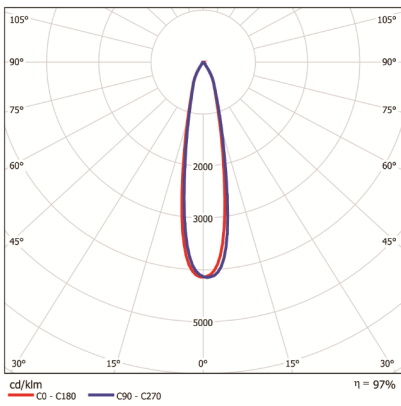

NX-DL-3-SLMS

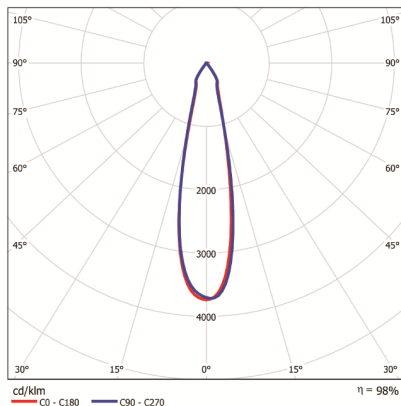

NX-DL-4-SLMS

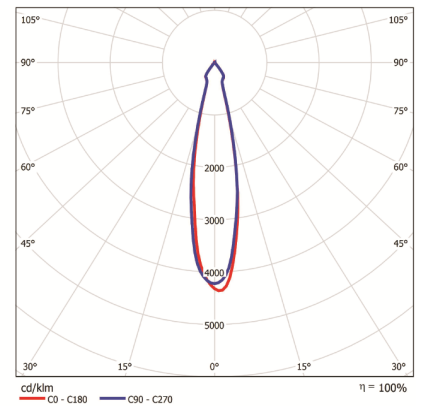

NX-DL-5-SLMS



NOXEL[®]
LED LUMINAIRES

WWW.NOXEL.COM